

komfovent®

Description of
C6 / C6M
controller Modbus

This manual is compatible with C6 / C6M controller firmware version X.X.X.18 and above (X – does not matter).

C6 / C6M controller supports **Modbus RTU** and **Modbus TCP** protocols. Both protocols are using main commands to read and preset registers. Supported Modbus commands are presented in Table 1.

Table 1. Supported Modbus commands

| Function code | Description |
|---------------|---------------------------|
| 03 | Read Holding Registers |
| 06 | Preset Single Register |
| 16 | Preset Multiple Registers |

Modbus RTU protocol works via RS-485 interface. Default interface settings are presented in Table 2. Default interface settings and Modbus RTU protocol ID can be changed using the website. To change settings, connect air handling unit (AHU) to your network. Default AHU IP address is 192.168.0.60. Go to your browser and type default AHU IP address. You should see „Login“ window (Fig. 1). To login type username and password. Default username: „user“ and password: „user“.


Table 2. Default settings of RS485 interface

| | |
|-------------|-------|
| Baudrate | 19200 |
| Word length | 8 |
| Parity | EVEN |
| Stop bits | 1 |



Fig. 1. Website login window

To find RS-485 interface settings and Modbus RTU protocol ID go to „SETTINGS“ and „CONNECTIVITY“ (Fig. 2). If you logged in, but can't open „SETTINGS“ window make sure, that JavaScript in your web browser is enabled (activated).

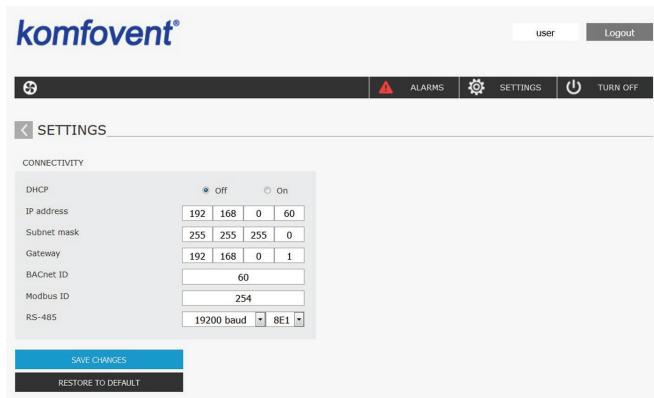
**Fig. 2. Connectivity settings**

If you can't see „Login“ window, make sure that:


- your device and air handling unit are connected in the same network;
- your device and air handling unit are in the same subnet;
- your proxy server and firewall isn't blocking connection;
- you typed correct IP address.

If your device is connected directly to C6 / C6M controller, make sure, that your DHCP server is disabled and your static IP is in same subnet. If you are using PC and Windows operating system, go to „Local Area Connection Properties“, go to „Internet Protocol Version 4 (TCP/IPv4) Properties“ (Fig. 3), check „Use the following IP address“ and type your static parameters, for example:

- IP address: 192.168.0.61;
- Subnet Mask: 255.255.255.0;
- Default gateway: 192.168.0.1.

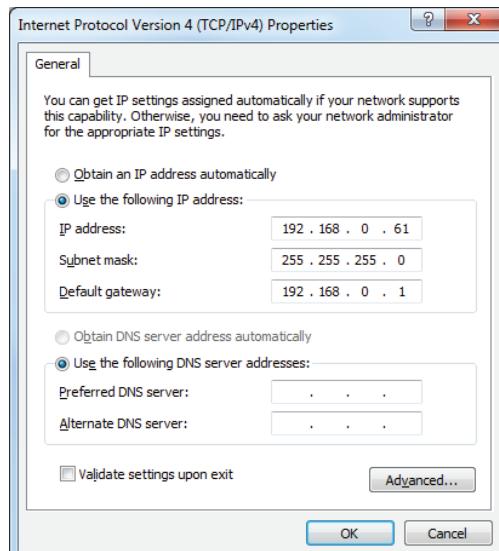**Fig. 3. Personal computer static IP address configuration**

The air handling unit has external connection terminals in the control box, inside the air handling unit. Modbus A and B communication wires can be connected to 1 and 2 terminals of connection for external elements (Fig. 4, Fig. 5, Fig. 6). To connect devices use twisted pair cable. Maximum cable length is 150 m. C6 / C6M controller ground point and ground point of another Modbus device should be connected together, if distance between the RS-485 interfaces is more than 10 m. (Fig. 4, Fig. 5, Fig. 6).

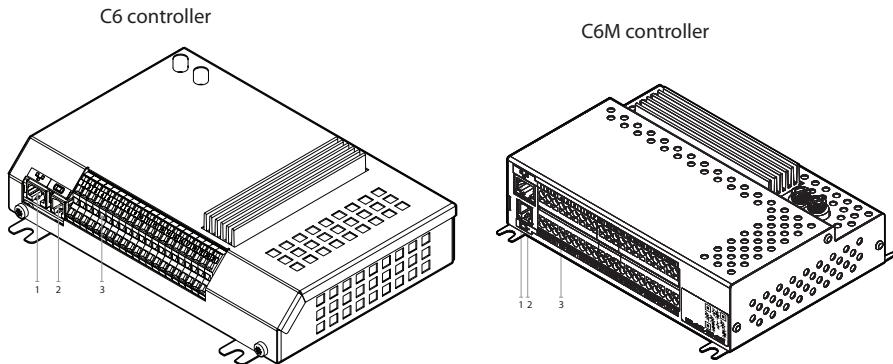

1. Ethernet connection of computer network or Internet
2. Controller panel connection
3. Connection of external elements

Fig. 4. C6 and C6M controllers with the connection terminals

| RS485 | TG1 | DX | AUX | B1 | B5 | OUTPUTS | S1 |
|--|--|----------------------------------|-------------------------|------------|---------------------------|---------|----|
| | A B | Modbus RTU | | | | | |
| 1 2 3 | 0..10V GND +24V | Water mixing valve actuator | | | | | |
| 4 5 6 | GND +24V | | | | | | |
| 7 | 0..10V GND +24V | External DX unit | 24V DC: 0-10V output | NTC 10k | Supply air temp. sensor | | |
| 8 9 10 11 | +24V | | | NTC 10k | Return water temp. sensor | | |
| 22 23 24 25 26 27 | NO NO NO NC Common Common | Supply air VAV sensor | | C | Common | | |
| 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 | 0..10V GND +24V | Exhaust air VAV sensor | | NO | Heating | | |
| | | Air quality or humidity sensor 1 | | NO | Cooling | | |
| | | | | NO | Alarm | | |
| | | | | N | Water pump Max. load 100W | | |
| INPUTS | B6 | B7 | B8 | B9 | FG1 | | |
| | | | | | | | |

Fig. 5. C6 connection diagram for external elements

| | | | | | | | |
|---------|----------------------------------|--------|----|----|------------|---------------------------------|-------|
| B6 | Supply air VAV sensor | 0..10V | 22 | 1 | NTC 10k | Return water temperature sensor | B5 |
| | | GND | 23 | 2 | | | |
| | | +24V | 24 | 3 | NTC 10k | Supply air temperature sensor | B4 |
| B7 | Extract air VAV sensor | 0..10V | 25 | 4 | | | |
| | | GND | 26 | 5 | C | Common | |
| | | +24V | 27 | 6 | NO | Control | |
| B8 | Air quality or humidity sensor 1 | 0..10V | 28 | 7 | NC | Fire alarm | |
| | | GND | 29 | 8 | NO | Fireplace | |
| | | +24V | 30 | 9 | NO | Kitchen | |
| B9 | Air quality or humidity sensor 2 | 0..10V | 31 | 10 | NO | Override | |
| | | GND | 32 | 11 | 0..10V | | |
| | | +24V | 33 | 12 | GND | | |
| OUTPUTS | Common | C | 34 | 13 | +24V | 24V DC; 0..10V output | AUX |
| | Heating | NO | 35 | 14 | +24V | | |
| | Cooling | NO | 36 | 15 | 0..10V | External DX unit | DX |
| | Alarm | NO | 37 | 16 | GND | | |
| FG1 | Air damper actuators Max. 15 W | Q | 38 | 17 | 0..10V | Water mixing valve actuator | TG1 |
| | | ~230V | 39 | 18 | GND | | |
| | | N | 40 | 19 | +24V | | |
| S1 | Water pump Max. 100 W | ~230V | 41 | 20 | A | Modbus RTU | RS485 |
| | | N | 42 | 21 | B | | |

Fig. 6. C6M connection diagram for external elements

Modbus TCP protocol works via Ethernet interface, connection is provided to RJ-45 socket on the C6 / C6M controller (Fig. 4). Default IP address is 192.168.0.60, and port is 502. To connect C6 / C6M controller via Modbus TCP make sure, that proxy servers or firewall isn't blocking device destination IP address and 502 port is opened. Controller IP address can be changed using the website (Fig. 2). Instructions how to connect and login to website was presented at Modbus RTU section. IP address and subnet mask also can be changed using C6.1 touch panel. To find these settings click touch C6.1 panel screen, click „Menu“ button, click „Settings“ button and don't release it, for more than 5 seconds, after that „Advanced settings“ window will pop-up. Click „Connectivity“ button and here you will find IP address and subnet mask (Fig. 7). If you want to change one of these parameters, just click on it and edit.

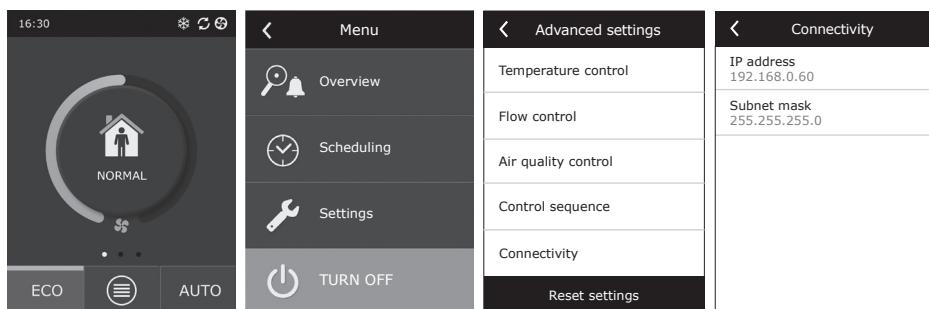


Fig. 7. C6.1 touch panel connectivity settings

For connection the CAT5 category cable should be used. The maximum cable length between device and controller C6 / C6M is 100 m.

C6 / C6M controller Modbus registers with descriptions are presented in Table 3.

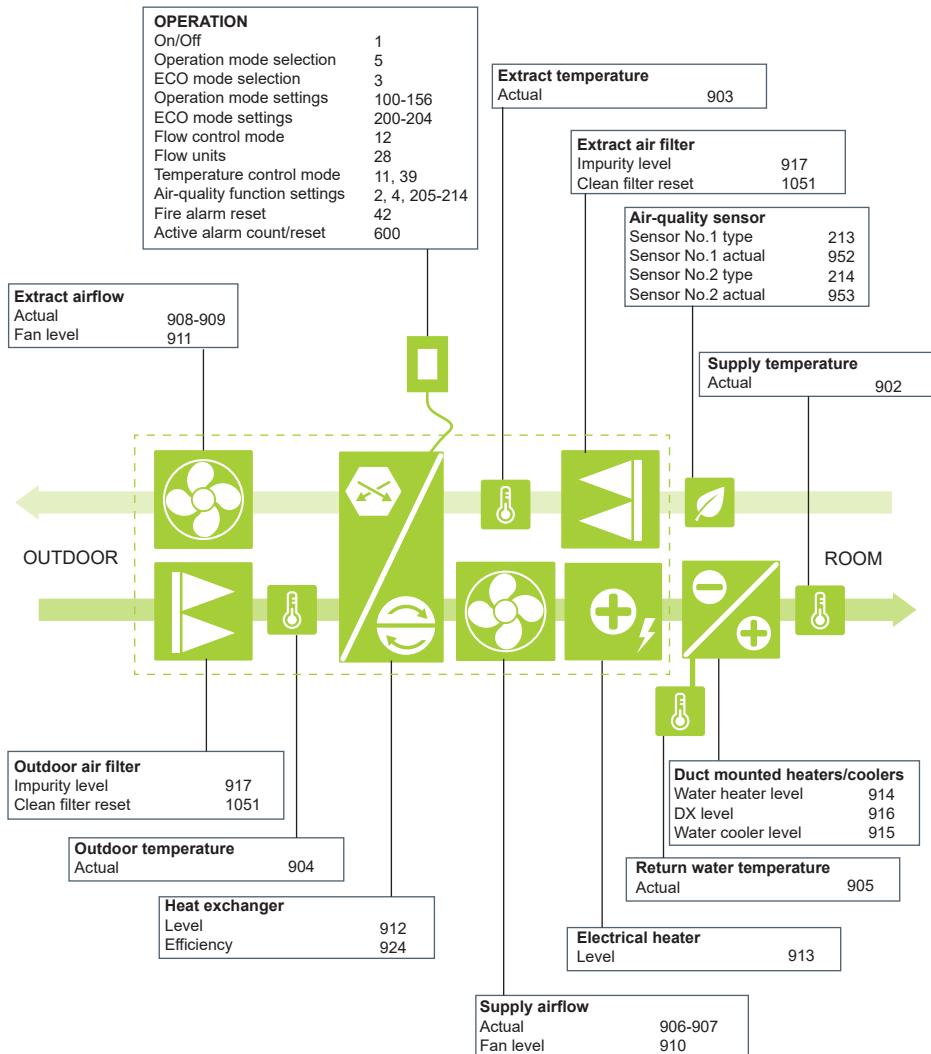


Table 3

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|------------------------------|-----------|-----------------|--------------------------|--------|----------------|------------|---|--|
| | | | | Access | Type | Range | | |
| Main control | Modes | 1 | ON/OFF status | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 2 | Auto mode control | RO | unsigned char | 0 - 1 | Scheduling = 0, Air Quality = 1 | |
| | | 3 | ECO mode | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 4 | AUTO mode | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 5 | Current mode | R/W | unsigned char | 0 - 10 | READ ONLY: Standby = 0, Away = 1, Normal = 2, Intensive = 3, Boost = 4, Kitchen = 5, Fireplace = 6, Override = 7, Holiday = 8, Air quality = 9, Off = 10 WRITE ONLY: Away = 1, Normal = 2, Intensive = 3, Boost = 4 | |
| | | 6 | Scheduler operation mode | R/W | unsigned char | 0 - 3 | StayAtHome = 0, WorkingWeek = 1, Office = 2, Custom = 3 | |
| | | 7 | Next mode | RO | unsigned char | 0 - 8 | Standby = 0, Away = 1, Normal = 2, Intensive = 3, Boost = 4, Kitchen = 5, Fireplace = 6, Override = 7, Holidays = 8 | |
| | | 8 | Next mode start time | RO | unsigned short | 0 - 1439 | Minutes | (0 - 1439 => 0:00 - 23:59); 130 => 2:10 |
| | | 9 | Next mode weekday | RO | unsigned char | 0 - 7 | Week days: None = 0, Mo = 1, Tu = 2, We = 3, Th = 4, Fr = 5, Sa = 6, Su = 7 | |
| | | 10 | Before been mode mask | RO | Unsigned char | 0 - 31 | Standby => 0, Away => 1 bit, Normal => 2 bit, Intensive => 3 bit, Boost => 4 bit | |
| Temperature and flow control | | 11 | Temperature control | R/W | unsigned char | 0 - 3 | Supply = 0, Extract = 1, Balance = 2, Room = 3 | |
| | | 39 | Room sensor | R/W | unsigned char | 0 - 1 | Panel temperature(1) = 0, Panel temperature(2) = 1 | |
| | | 12 | Flow control | R/W | unsigned char | 0 - 2 | CAV = 0, VAV = 1, DCV = 2, OFF = 3 | |
| | | 13-14 | Maximum supply flow | RO | unsigned int | 0 - 200000 | m3/h, l/s | |
| | | 15-16 | Maximum extract flow | RO | unsigned int | 0 - 200000 | m3/h, l/s | |
| | | 17 | Max supply pressure | R/W | unsigned short | 0 - 1000 | Pa | |
| | | 18 | Max extract pressure | R/W | unsigned short | 0 - 1000 | Pa | |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|---------------|------------------|-----------------|--------------------|--------|----------------|-------------------------------------|---|-----------------------------------|
| | | | | Access | Type | Range | | |
| Main control | Control sequence | 19 | Stage 1 | R/W | unsigned char | 0 - 3 | None = 0, External coil = 1, Electric heater = 2, External Dx unit = 3 , | |
| | | 20 | Stage 2 | R/W | unsigned char | 0 - 3 | None = 0, External coil = 1, Electric heater = 2, External Dx unit = 3 , | |
| | | 21 | Stage 3 | R/W | unsigned char | 0 - 3 | None = 0, External coil = 1, Electric heater = 2, External Dx unit = 3 , | |
| | | 22 | Coil type | R/W | unsigned char | 0 - 1 | Hot water = 0, Cold water = 1, Combi = 2, | |
| | | 40 | Icing protection | R/W | unsigned char | 0 - 2 | Off = 0, On = 1, External coil = 2 | Only for plate heat exchanger |
| | | 41 | Indoor humidity | R/W | unsigned char | -1; 10-90 | Auto = -1, Manual = 10-90%RH | Only for plate heat exchanger |
| Main control | Connectivity | 35 | DHCP On/Off | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 23-24 | IP | R/W | unsigned int | | default 192.168.0.60 | |
| | | 25-26 | Mask | R/W | unsigned int | | default 255.255.255.0 | |
| | | 36-37 | Gateway | R/W | unsigned int | | default 192.168.0.1 | |
| | | 38 | BACnet ID | R/W | unsigned int | 0 - 4194303 | default 60 | |
| | | 44 | Bacnet Port | R/W | unsigned short | 1-65535 | default 47808 | |
| Main control | Settings | 27 | Language | R/W | unsigned char | 0-255 | English = 0, Lithuanian = 1, Russian = 2 ... | |
| | | 28 | Flow units | R/W | unsigned char | 0 - 1 | m3/h = 0, l/s = 1 | |
| | | 42 | Fire alarm restart | R/W | unsigned char | 0 - 1 | Manual = 0, Auto = 1 | |
| | | 29 | Time, HH:MM | R/W | unsigned short | MSB 0x00 - 0x17, LSB 0x00 - 0x3B | MSB - hours, LSB - minutes | 0x0B36 => 11:54 |
| | | 30 | Year | R/W | unsigned short | 2017 - 2035 | Year | 0x07E0 => 2016 |
| | | 31 | Month/Day | R/W | unsigned short | MSB 0x01 - 0x0C, LSB 0x01 - 0x1F | MSB - month, LSB - day | 0x020C => Feb12 |
| Mode settings | Time and date | 32 | Week day | RO | unsigned char | 1 - 7 | Mo = 1, Tu = 2, We = 3, Th = 4, Fr = 5, Sa = 6, Su = 7 | |
| | | 33-34 | Time since 1970 | RO | unsigned int | 1483228800 - 2051222400 | based on seconds since standard epoch of 1/1/1970 | 1456329600 => 2016.02.24 16:00:00 |
| | | 100-101 | Supply flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, Pa, % | |
| | | 102-103 | Extract flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, Pa, % | |
| | | 104 | Setpoint | R/W | signed short | 50 - 400 | x10 C | |
| | | 105 | Heating | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| Mode settings | Normal | 106-107 | Supply flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, Pa, % | |
| | | 108-109 | Extract flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, Pa, % | |
| | | 110 | Setpoint | R/W | signed short | 50 - 400 | x10 C | |
| | | 111 | Heating | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 112-113 | Supply flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, Pa, % | |
| | | 114-115 | Extract flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, Pa, % | |
| Mode settings | Intensive | 116 | Setpoint | R/W | signed short | 50 - 400 | x10 C | |
| | | 117 | Heating | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|---------------|-----------|-----------------|--------------------------------|--------|----------------|----------------------------------|---|-----------------------------------|
| | | | | Access | Type | Range | | |
| Mode settings | Boost | 118-119 | Supply flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, Pa, % | |
| | | 120-121 | Extract flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, Pa, % | |
| | | 122 | Setpoint | R/W | signed short | 50 - 400 | x10 C | |
| | | 123 | Heating | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | Kitchen | 124-125 | Supply flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, % | |
| | | 126-127 | Extract flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, % | |
| | | 128 | Setpoint | R/W | signed short | 50 - 400 | x10 C | |
| | | 129 | Heating | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 130 | Timer time | R/W | unsigned short | 0 - 300 | Minutes | |
| | Fireplace | 131-132 | Supply flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, % | |
| | | 133-134 | Extract flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, % | |
| | | 135 | Setpoint | R/W | signed short | 50 - 400 | x10 C | |
| | | 136 | Heating | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 137 | Timer time | R/W | unsigned short | 0 - 300 | Minutes | |
| | Override | 138-139 | Supply flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, % | |
| | | 140-141 | Extract flow | R/W | unsigned int | 0 - 200000 | m3/h, l/s, % | |
| | | 142 | Setpoint | R/W | signed short | 50 - 400 | x10 C | |
| | | 143 | Heating | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 144 | Mode | R/W | unsigned char | 0 - 2 | All time = 0, If on = 1, If off = 2 | |
| | | 145 | Timer time | R/W | unsigned short | 0 - 300 | Minutes | |
| | | 157 | Delayed start | R/W | unsigned char | 0 - 10 | Minutes | |
| | | 158 | Delayed stop | R/W | unsigned char | 0 - 30 | Minutes | |
| Holidays | Holidays | 146 | Microventilation | R/W | unsigned char | 1 - 4 | Once per day = 1, Twice per day = 2, Thrice per day = 3, Four times per day = 4, | |
| | | 147 | Setpoint | R/W | signed short | 50 - 400 | x10 C | |
| | | 148 | Heating | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 149-150 | From Day/Month | R/W | unsigned int | 1483228800 - 2051222400 | based on seconds since standard epoch of 1/1/1970 | 1456329600 => 2016.02.24 16:00:00 |
| | | 151-152 | Till Day/Month | R/W | unsigned int | 1483228800 - 2051222400 | based on seconds since standard epoch of 1/1/1970 | 1456329600 => 2016.02.24 16:00:00 |
| | | 153 | Year, from | R/W | unsigned short | 2017 - 2035 | | |
| | | 154 | Month/Day, from | R/W | unsigned short | MSB 0x01 - 0x0C, LSB 0x01 - 0x1F | MSB = month, LSB = day | 0x020C => Feb12 |
| | | 155 | Year, till | R/W | unsigned short | 2017 - 2035 | | |
| | | 156 | Month/Day, till | R/W | unsigned short | MSB 0x01 - 0x0C, LSB 0x01 - 0x1F | MSB = month, LSB = day | 0x020C => Feb12 |
| | | 200 | Minimum supply air temperature | R/W | unsigned short | 50 - 400 | x10 C | |
| Eco | Eco | 201 | Maximum supply air temperature | R/W | unsigned short | 50 - 400 | x10 C | |
| | | 202 | Free heating/cooling | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 203 | Heating enable denied | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 204 | Cooling enable denied | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 217 | Heat recovery control | R/W | unsigned char | 0 - 2 | Auto = 0, Constant = 1, Non stop = 2 | |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|-----------|---------------------|-----------------|---------------|-------------------------------|------|----------------|---------------------------------|---|
| | | | | Access | Type | Range | | |
| Scheduler | Stay at home | Air quality | 205 | Air quality Enable | R/W | unsigned char | 0 - 1 | Disabled = 0, Enabled = 1 |
| | | | 206 | Temperature setpoint | R/W | signed short | 50 - 400 | x10 C |
| | | | 207 | Air quality setpoint | R/W | unsigned short | C02: 0 - 2000, VOC: 0 - 100, | ppm, % |
| | | | 208 | Humidity setpoint | R/W | unsigned short | RH: 0 - 100, | % |
| | | | 209 | Air quality minimum intensity | R/W | unsigned char | 0, 20 - 100 | % |
| | | | 210 | Air quality maximum intensity | R/W | unsigned char | 0, 20 - 100 | % |
| | | | 211 | Air quality heating | R/W | unsigned char | 0 - 1 | Off = 0, On = 1 |
| | | | 212 | Air quality check period | R/W | unsigned char | 1 - 24 | Hours |
| | | | 213 | Air quality sensor type B8 | R/W | unsigned char | 0 - 3 | None = 0, CO2 = 1, VOC = 2, RH = 3 |
| | | | 214 | Air quality sensor type B9 | R/W | unsigned char | 0 - 3 | None = 0, CO2 = 1, VOC = 2, RH = 3 |
| Scheduler | Operation program 1 | Weekday mask | 300 | Weekday mask | R/W | unsigned char | 0b00000000 - 0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit |
| | | | 301 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | 302 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 303 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 304 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | Event 1 | 305 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 306 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 307 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | Event 2 | 308 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 309 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 310 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | Event 3 | 311 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 312 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 313 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | Event 4 | 314 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 315 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 316 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments | |
|-----------|---------------------|-----------------|------------------|--------|----------------|-----------------------|---|-----------------------|--|
| | | | | Access | Type | Range | | | |
| Scheduler | Stay at home | Weekday mask | 316 Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit | | |
| | | | | | | | | | |
| | | Event 1 | 317 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | | | | | | | | |
| | | Event 2 | 318 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | | | | | | | |
| | | Event 3 | 319 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | | | | | | | |
| | Operation program 2 | Event 4 | 320 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | | | | | | | | |
| | | Event 5 | 321 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | | | | | | | |
| | | Event 6 | 322 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | | | | | | | |
| | Operation program 3 | Event 7 | 323 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | | | | | | | | |
| | | Event 8 | 324 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | | | | | | | |
| | | Event 9 | 325 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | | | | | | | |
| | Operation program 1 | Weekday mask | 332 Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit | | |
| | | | | | | | | | |
| | | Event 1 | 333 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | | | | | | | | |
| | | Event 2 | 334 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | | | | | | | |
| | | Event 3 | 335 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | | | | | | | |
| | | Event 4 | 336 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | | | | | | | | |
| | | Event 5 | 337 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | | | | | | | |
| | | Event 6 | 338 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | | | | | | | |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments | | |
|-----------|--------------|---------------------|---------------|--------|--------------|-------|------------------|-----------------------|---|--|
| | | | | Access | Type | Range | | | | |
| Scheduler | Stay at home | Operation program 3 | Event 3 | 339 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | |
| | | | | 340 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | | 341 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | Event 4 | 342 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | |
| | | | | 343 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | Event 5 | 344 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | | 345 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | |
| | | | | 346 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | Operation program 4 | Event 1 | 347 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | | 348 | Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit | |
| | | | | 349 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | |
| | | | | 350 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | | 351 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | Event 2 | 352 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | |
| | | | | 353 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | Event 3 | 354 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | | 355 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | |
| | | | | 356 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | Event 4 | 357 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | | 358 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | |
| | | | | 359 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | Event 5 | | 360 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | | 361 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | |
| | | | | 362 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | | 363 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|-----------|---------------------|-----------------|---------------|--------------|------|----------------|-------------------------|---|
| | | | | Access | Type | Range | | |
| Scheduler | Working week | Weekday mask | 364 | Weekday mask | R/W | unsigned char | 0b00000000 - 0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit |
| | | | 365 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | Event 1 | 366 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 367 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 368 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | Operation program 1 | Event 2 | 369 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 370 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 371 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | Event 3 | 372 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 373 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | Operation program 2 | Event 4 | 374 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | 375 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 376 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | Event 5 | 377 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | 378 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 379 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | Event 1 | 380 | Weekday mask | R/W | unsigned char | 0b00000000 - 0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit |
| | | | 381 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | 382 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 383 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 384 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | Event 2 | 385 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 386 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments | |
|-----------|--------------|---------------------|---------------|------------|--------------|----------------|------------------|----------------------------|---|
| | | | | Access | Type | Range | | | |
| Scheduler | Working week | Operation program 2 | Event 3 | 387 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 388 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 389 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | Event 4 | 390 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 391 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | Event 5 | 392 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 393 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 394 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 395 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | Operation program 3 | Event 1 | 396 | Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit |
| | | | | 397 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 398 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 399 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | Event 2 | 400 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 401 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 402 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 403 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 404 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | Event 3 | 405 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 406 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 407 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 408 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 409 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | Event 4 | 410 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | 411 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | 411 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|-----------|---------------------|---------------------|---------------|--------|--------------|-------|------------------|--|
| | | | | Access | Type | Range | | |
| Scheduler | Working week: | Operation program 4 | Weekday mask | 412 | Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit |
| | | | | 413 | Mode | R/W | unsigned char | 0 - 4 Standby = 0, Away = 1, Normal = 2, Intensive = 3, Boost = 4 |
| | | | | 414 | Start time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | | | 415 | Stop time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | | | 416 | Mode | R/W | unsigned char | 0 - 4 Standby = 0, Away = 1, Normal = 2, Intensive = 3, Boost = 4 |
| | | Event 2 | Event 2 | 417 | Start time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | | | 418 | Stop time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | | | 419 | Mode | R/W | unsigned char | 0 - 4 Standby = 0, Away = 1, Normal = 2, Intensive = 3, Boost = 4 |
| | | | | 420 | Start time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | | | 421 | Stop time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | Event 4 | Event 4 | 422 | Mode | R/W | unsigned char | 0 - 4 Standby = 0, Away = 1, Normal = 2, Intensive = 3, Boost = 4 |
| | | | | 423 | Start time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | | | 424 | Stop time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | | | 425 | Mode | R/W | unsigned char | 0 - 4 Standby = 0, Away = 1, Normal = 2, Intensive = 3, Boost = 4 |
| | | | | 426 | Start time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | | | 427 | Stop time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| Office | Operation program 1 | Weekday mask | Weekday mask | 428 | Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit |
| | | | | 429 | Mode | R/W | unsigned char | 0 - 4 Standby = 0, Away = 1, Normal = 2, Intensive = 3, Boost = 4 |
| | | | | 430 | Start time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | | | 431 | Stop time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | Event 2 | Event 2 | 432 | Mode | R/W | unsigned char | 0 - 4 Standby = 0, Away = 1, Normal = 2, Intensive = 3, Boost = 4 |
| | | | | 433 | Start time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |
| | | | | 434 | Stop time | R/W | unsigned short | 0:00 - 23:59 MSB - hours, LSB - minutes |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments | |
|-----------|---------------------|---------------------|---------------|------------|--------------|----------------|------------------|--|---|
| | | | | Access | Type | Range | | | |
| Scheduler | Operation program 1 | Event 3 | 435 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | |
| | | | 436 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | 437 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | Event 4 | 438 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | |
| | | | 439 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | Event 5 | 440 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | 441 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | |
| | | | 442 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | | | 443 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | |
| | Office | Operation program 2 | Weekday mask | 444 | Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit | |
| | | | | 445 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 446 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 447 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | Event 2 | 448 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 449 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 450 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | Event 3 | Event 1 | 451 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 452 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 453 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | Event 4 | 454 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 455 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 456 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | Event 5 | Event 2 | 457 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 458 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 459 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments | |
|-----------|---------------------|-----------------|------------------|--------|----------------|-----------------------|---|-----------------------|--|
| | | | | Access | Type | Range | | | |
| Scheduler | Operation program 3 | Weekday mask | 460 Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit | | |
| | | | | | | | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | Event 1 | 461 Mode | R/W | unsigned char | 0 - 4 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 462 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | Event 2 | 463 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 464 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | Event 3 | 465 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 466 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | Office | Event 4 | 467 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | | 470 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | Event 5 | 471 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 473 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | Event 1 | 474 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 475 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| Scheduler | Operation program 4 | Weekday mask | 476 Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit | | |
| | | | | | | | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | Event 1 | 477 Mode | R/W | unsigned char | 0 - 4 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 478 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | Event 2 | 479 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 480 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | Event 1 | 481 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 482 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|-----------|---------------------|-----------------|---------------|--------------|------|----------------|-------------------------|---|
| | | | | Access | Type | Range | | |
| Scheduler | Operation program 4 | Event 3 | 483 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | 484 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 485 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | Event 4 | 486 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | 487 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | Event 5 | 488 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 489 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | 490 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 491 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 492 | Weekday mask | R/W | unsigned char | 0b00000000 - 0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit |
| Custom | Operation program 1 | Event 1 | 493 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | 494 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 495 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | Event 2 | 496 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | 497 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | Event 3 | 498 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 499 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | 500 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 501 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 502 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | Event 4 | Event 2 | 503 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 504 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | Event 5 | 505 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | 506 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | 507 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments | |
|-----------|---------------------|-----------------|------------------|--------|----------------|-----------------------|---|-----------------------|--|
| | | | | Access | Type | Range | | | |
| Scheduler | Operation program 2 | Weekday mask | 508 Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit | | |
| | | | | | | | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | Event 1 | 509 Mode | R/W | unsigned char | 0 - 4 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 510 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | Event 2 | 511 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 512 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | Event 3 | 513 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 514 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | Custom | Event 4 | 515 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | | 516 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | Event 5 | 517 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 518 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | Event 1 | 519 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 520 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | Operation program 3 | Weekday mask | 521 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | | | | | | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | Event 1 | 522 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 523 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | Event 2 | 524 Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit | | |
| | | | | | | | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | Event 1 | 525 Mode | R/W | unsigned char | 0 - 4 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 526 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | Event 2 | 527 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 528 Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 | | |
| | | Event 1 | 529 Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |
| | | | 530 Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes | 0x0805 => 8:05 | |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments | |
|-----------|-----------|---------------------|---------------|--------|--------------|-------|------------------|-----------------------|---|
| | | | | Access | Type | Range | | | |
| Scheduler | Custom | Operation program 3 | Event 3 | 531 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 532 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 533 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | Event 4 | 534 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 535 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | Event 5 | 536 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 537 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 538 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | Operation program 4 | Event 1 | 539 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 540 | Weekday mask | R/W | unsigned char | 0b00000000-0b01111111 | Mo => 0 bit, Tu => 1 bit, We => 2 bit, Th => 3 bit, Fr => 4 bit, Sa => 5 bit, Su => 6 bit |
| | | | | 541 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 542 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 543 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | Event 2 | 544 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 545 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | Event 3 | 546 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 547 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 548 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | Event 4 | 549 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 550 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | | 551 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 552 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 553 | Mode | R/W | unsigned char | 0 - 4 | Standby = 0, Away = 1, Normal =2, Intensive =3, Boost = 4 |
| | | | Event 5 | 554 | Start time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |
| | | | | 555 | Stop time | R/W | unsigned short | 0:00 - 23:59 | MSB - hours, LSB - minutes |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|----------------|---------------|-----------------|------------------------------|--------|----------------|--------------------------------------|-------------------|--|
| | | | | Access | Type | Range | | |
| Alarms | Active alarms | 600 | Active alarms count | R/W | unsigned char | 0 - 10 | | Writing 0x99C6 - Active alarms reset and restore previous mode |
| | | 601 | Active alarm 1 code (newest) | RO | unsigned char | 0x01 - 0xFF | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | 602 | Active alarm 2 code | RO | unsigned char | 0x01 - 0xFF | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | 603 | Active alarm 3 code | RO | unsigned char | 0x01 - 0xFF | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | 604 | Active alarm 4 code | RO | unsigned char | 0x01 - 0xFF | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | 605 | Active alarm 5 code | RO | unsigned char | 0x01 - 0xFF | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | 606 | Active alarm 6 code | RO | unsigned char | 0x01 - 0xFF | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | 607 | Active alarm 7 code | RO | unsigned char | 0x01 - 0xFF | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | 608 | Active alarm 8 code | RO | unsigned char | 0x01 - 0xFF | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | 609 | Active alarm 9 code | RO | unsigned char | 0x01 - 0xFF | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| Alarms history | Alarm 1 | 610 | Active alarm 10 code | RO | unsigned char | 0x01 - 0xFF | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | 611 | Alarm history count | RO | unsigned char | 0 - 50 | | |
| | | 612 | Alarm (newest) year | RO | unsigned short | 2016 - 2250 | Year | |
| | | 613 | Alarm (newest) month-day | RO | unsigned short | 01.01 - 12.31 | Month and day | 0x020C => Feb12 |
| | | 614 | Alarm (newest) time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes | 0x0805 => 8:05 |
| | | 615 | Alarm (newest) seconds | RO | unsigned char | 0 - 59 | Seconds | |
| | | 616 | Alarm (newest) code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | Alarm 2 | 617 | Alarm year | RO | unsigned short | 2016 - 2250 | Year | |
| | | 618 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day | 0x020C => Feb12 |
| | | 619 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes | 0x0805 => 8:05 |
| | | 620 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds | |
| | | 621 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|--------|----------------|-----------------|---------------|-----------------|------|----------------|---|---|
| | | | | Access | Type | Range | | |
| Alarms | Alarms history | Alarm 3 | 622 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 623 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 624 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 625 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 626 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 4 | 627 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 628 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 629 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 630 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | Alarm 5 | 631 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 632 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 633 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 634 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 635 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | Alarm 6 | 636 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 637 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 638 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 639 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 640 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | Alarm 7 | 641 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 642 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 643 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 644 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 645 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | Alarm 8 | 646 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 647 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 648 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 649 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 650 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | Alarm 9 | 651 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 652 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 653 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 654 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 655 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 656 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|--------|----------------|-----------------|---------------|-----------------|------|----------------|---|---|
| | | | | Access | Type | Range | | |
| Alarms | Alarms history | Alarm 10 | 657 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 658 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 659 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 660 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 661 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 662 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 663 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 664 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | Alarm 11 | 665 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 666 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | Alarms history | Alarm 12 | 667 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 668 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 669 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 670 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 671 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 672 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 673 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 674 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | Alarms history | Alarm 13 | 675 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 676 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 14 | 677 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 678 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 679 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 680 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 681 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 682 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | Alarms history | Alarm 15 | 683 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 684 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 685 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 686 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 16 | 687 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 688 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 689 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 690 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 691 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|--------|----------------|-----------------|---------------|-----------------|------|----------------|---|---|
| | | | | Access | Type | Range | | |
| Alarms | Alarms history | Alarm 17 | 692 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 693 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 694 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 695 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 696 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 18 | 697 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 698 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 699 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 700 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 701 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 19 | 702 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 703 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 704 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 705 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 706 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 20 | 707 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 708 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 709 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 710 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 711 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 21 | 712 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 713 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 714 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 715 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 716 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 22 | 717 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 718 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 719 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 720 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 721 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 23 | 722 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 723 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 724 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 725 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 726 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|--------|----------------|-----------------|---------------|-----------------|------|----------------|---|---|
| | | | | Access | Type | Range | | |
| Alarms | Alarms history | Alarm 24 | 727 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 728 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 729 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 730 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 731 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 25 | 732 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 733 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | Alarms history | Alarm 26 | 734 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 735 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 736 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 737 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 738 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | Alarm 27 | 739 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 740 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | Alarms history | Alarm 28 | 741 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 742 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 743 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 744 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 745 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | Alarm 29 | 746 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 747 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | Alarm 30 | 748 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 749 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 750 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 751 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 752 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 753 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 754 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 755 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 756 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 757 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 758 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 759 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 760 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 761 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|--------|----------------|-----------------|---------------|-----------------|------|----------------|---|---|
| | | | | Access | Type | Range | | |
| Alarms | Alarms history | Alarm 31 | 762 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 763 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 764 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 765 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 766 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 32 | 767 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 768 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | Alarms history | Alarm 33 | 769 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 770 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 771 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 772 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 773 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | Alarm 34 | 774 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 775 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | Alarms history | Alarm 35 | 776 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 777 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 778 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 779 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 780 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | Alarm 36 | 781 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 782 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | Alarm 37 | 783 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 784 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 785 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 786 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 787 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 788 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 789 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 790 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 791 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | | 792 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 793 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 794 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 795 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 796 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|--------|----------------|-----------------|---------------|-----------------|------|----------------|---|---|
| | | | | Access | Type | Range | | |
| Alarms | Alarms history | Alarm 38 | 797 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 798 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 799 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 800 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 801 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | Alarms 39 | Alarm 39 | 802 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 803 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 804 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 805 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 806 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | Alarms 40 | Alarm 40 | 807 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 808 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 809 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 810 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 811 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | Alarms 41 | Alarm 41 | 812 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 813 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 814 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 815 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 816 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | Alarms 42 | Alarm 42 | 817 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 818 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 819 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 820 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 821 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | Alarms 43 | Alarm 43 | 822 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 823 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 824 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 825 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 826 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | Alarms 44 | Alarm 44 | 827 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 828 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 829 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 830 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 831 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|------------|----------------------|-----------------|---------------|----------------------|------|----------------|---|---|
| | | | | Access | Type | Range | | |
| Alarms | Alarms history | Alarm 45 | 832 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 833 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 834 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 835 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 836 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 46 | 837 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 838 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 839 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 840 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 841 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 47 | 842 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 843 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 844 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 845 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 846 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 48 | 847 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 848 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 849 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 850 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 851 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 49 | 852 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 853 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 854 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 855 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 856 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| | | Alarm 50 | 857 | Alarm year | RO | unsigned short | 2016 - 2250 | Year |
| | | | 858 | Alarm month-day | RO | unsigned short | 01.01 - 12.31 | Month and day |
| | | | 859 | Alarm time | RO | unsigned short | 0:00 - 23:59 | Hours and minutes |
| | | | 860 | Alarm seconds | RO | unsigned char | 0 - 59 | Seconds |
| | | | 861 | Alarm code | RO | unsigned char | 1 - 127 F alarms, 129 - 255 W alarms | 0x02 => 2F (MSb = 0), 0x82 => 2W (MSb = 1) |
| Monitoring | Detailed information | | 900 | Status icon bit mask | RO | unsigned short | 0 - 8191 | Starting => 0 bit, Stoping => 1 bit, Fan => 2 bit, Rotor => 3 bit, Heating => 4 bit, Cooling => 5 bit, HeatingDenied => 6 bit, CoolingDenied => 7 bit, FlowDown => 8 bit, FreeHeating => 9 bit, FreeCooling => 10 bit, Alarmf => 11 bit, AlarmW => 12 bit |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|----------------------|-----------|-----------------|---|--------|----------------|----------------|--|-----------------------|
| | | | | Access | Type | Range | | |
| Detailed information | | 901 | Heating/cooling config | RO | unsigned char | 0 - 7 | Electric heater => 0 bit, Water cooler/heater => 1 bit, DX unit => 2 bit | |
| | | 902 | Supply temperature | RO | signed short | -500 - 1200 | x10 C | |
| | | 903 | Extract Temperature | RO | signed short | -500 - 1200 | x10 C | |
| | | 904 | Outdoor temp | RO | signed short | -500 - 1200 | x10 C | |
| | | 905 | Water temperature | RO | signed short | -500 - 1200 | x10 C | |
| | | 906-907 | Current supply flow | RO | unsigned int | 0 - 200000 | m3/h, l/s | |
| | | 908-909 | Current extract flow | RO | unsigned int | 0 - 200000 | m3/h, l/s | |
| | | 910 | Current supply fan intensity | RO | unsigned short | 0 - 1000 | x10 % | |
| | | 911 | Current extract fan intensity | RO | unsigned short | 0 - 1000 | x10 % | |
| | | 912 | Heat exchanger | RO | unsigned short | 0 - 1000 | x10 % | |
| | | 913 | Electric heater | RO | unsigned short | 0 - 1000 | x10 % | |
| | | 914 | Water heater | RO | unsigned short | 0 - 1000 | x10 % | |
| | | 915 | Water cooler | RO | unsigned short | 0 - 1000 | x10 % | |
| | | 916 | DX unit | RO | signed short | -1000 - +1000 | x10 % | |
| | | 917 | Filters Imaturity | RO | unsigned char | 0 - 100 | % | |
| | | 918 | Air dampers | RO | unsigned char | 0 - 100 | % | |
| | | 919 | Supply pressure | RO | unsigned short | 0 - 1000 | Pa | |
| | | 920 | Extract pressure | RO | unsigned short | 0 - 1000 | Pa | |
| | | 952 | Air quality or humidity (sensor 1 - B8) | RO | unsigned short | 0 - 65535 | ppm,% | |
| | | 953 | Air quality or humidity (sensor 2 - B9) | RO | unsigned short | 0 - 65535 | ppm,% | |
| | | 955 | Heat exchanger type | RO | unsigned char | 0 - 1 | Plate = 0, Rotary = 1 | |
| Monitoring | | 921 | Power consumption | RO | unsigned short | 0 - 65535 | W | |
| | | 922 | Heater power | RO | unsigned short | 0 - 65535 | W | |
| | | 923 | Heat exchanger recovery | RO | unsigned short | 0 - 65535 | W | |
| | | 924 | Heat exchanger efficiency | RO | unsigned char | 0 - 100 | % | |
| | | 925 | Energy saving | RO | unsigned char | 0 - 100 | % | |
| | | 926 | SPI | RO | unsigned short | 0 - 65535 | W/(m3/h) | |
| Consumption | | 927-928 | AHU consumption, Day | RO | unsigned int | 0 - 4294967296 | Wh | |
| | | 929-930 | AHU consumption, Month | RO | unsigned int | 0 - 4294967296 | Wh | |
| | | 931-932 | AHU consumption, Total | RO | unsigned int | 0 - 4294967296 | Wh | |
| | | 933-934 | Add. air heater consumption, Day | RO | unsigned int | 0 - 4294967296 | Wh | |
| | | 935-936 | Add. air heater consumption, Month | RO | unsigned int | 0 - 4294967296 | Wh | |
| | | 937-938 | Add. air heater consumption, Total | RO | unsigned int | 0 - 4294967296 | Wh | |
| | | 939-940 | Recovered energy, Day | RO | unsigned int | 0 - 4294967296 | Wh | |
| | | 941-942 | Recovered energy, Month | RO | unsigned int | 0 - 4294967296 | Wh | |
| | | 943-944 | Recovered energy, Total | RO | unsigned int | 0 - 4294967296 | Wh | |
| | | 945 | SPI per day | RO | unsigned short | 0 - 65535 | W/(m3/h) | |
| Panel | | 946 | Panel 1 temperature | RO | signed short | -500 - 1200 | x10 C | |
| | | 947 | Panel 1 humidity | RO | signed char | 0 - 100 | % | |
| | | 948 | Panel 1 air quality | RO | unsigned short | 0 - 65535 | ppm, ppb | |
| | | 949 | Panel 2 temperature | RO | signed short | -500 - 1200 | x10 C | |
| | | 950 | Panel 2 humidity | RO | signed char | 0 - 100 | % | |
| | | 951 | Panel 2 air quality | RO | unsigned short | 0 - 65535 | ppm, ppb | |
| | | 954 | Connected panels | RO | unsigned char | 0 - 3 | None = 0, Panel(1) = 1, Panel(2) = 2, Panel(1) and Panel(2) = 3 | |

| Group | Subgroups | Register number | Register name | Data | | | Values and Units | Examples and comments |
|--------|-----------|-----------------|---------------------------|--------|----------------|----------------|--|--|
| | | | | Access | Type | Range | | |
| Others | DOUT | 958 | Alarm | RO | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 959 | Heating | RO | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | | 960 | Cooling | RO | unsigned char | 0 - 1 | Off = 0, On = 1 | |
| | Panel 1 | 1000-1001 | Firmware version | RO | unsigned int | 1 - 4294967295 | 1st number 8bit <<24, 2nd number 4bit <<20, 3rd number 8bit <<12, 4th number 12bit<<0 | 18886660 => 1.2.3.4 |
| | | 1002-1003 | Panel 1 firmware version | RO | unsigned int | 1 - 4294967295 | 1st number 8bit <<24, 2nd number 4bit <<20, 3rd number 8bit <<12, 4th number 12bit<<0 | 18886660 => 1.2.3.4 |
| | | 1004-1005 | Panel 2 firmware version | RO | unsigned int | 1 - 4294967295 | 1st number 8bit <<24, 2nd number 4bit <<20, 3rd number 8bit <<12, 4th number 12bit<<0 | 18886660 => 1.2.3.4 |
| | | 1050 | Reset settings | R/W | unsigned short | 0 - 11 | Reset Away settings = 1, Reset Normal settings = 2, Reset Intensive settings = 3, Reset Boost settings = 4, Reset Holidays settings = 5, Reset Overide settings = 6, Reset Kitchen settings = 7, Reset Fireplace settings = 8, Reset Air quality settings = 9, Reset Eco settings = 10, Reset Advanced settings = 11 | |
| | | 1051 | Clean filters calibration | R/W | unsigned char | 1 | Confirm = 1 | Resets filters counter, if filter clogging is more than 1% |

UAB KOMFOVENT**SERVICE AND SUPPORT**

Phone: +370 5 200 8000
 service@komfovent.com
www.komfovent.com

Komfovent AB

Ögårdesvägen 12A
 433 30 Partille, Sverige
 Phone: +46 31 487 752
info_se@komfovent.com
www.komfovent.se

Komfovent Oy

Muuntotie 1 C1
 FI-01 510 VANTAA
 Phone: +358 20 730 6190
toimisto@komfovent.com
www.komfovent.com

Komfovent GmbH

Konrad-Zuse-Str. 2a, 42551 Velbert,
 Deutschland
 Phone: +49 0 2051 6051180
info@komfovent.de
www.komfovent.de

SIA Komfovent

Bukaišu iela 1, LV-1004 Riga
 Phone: +371 24 664433
info.lv@komfovent.com
www.komfovent.com

Vidzemes filiale

Alejas iela 12A, LV-4219 Valmiermuža,
 Valmieras pagasts, Burtnieku novads
 Phone: +371 29 358 145
kristaps.zaicews@komfovent.com
www.komfovent.com

Komfovent Ltd

Unit C1
 The Waterfront
 Newburn Riverside
 Newcastle upon Tyne
 NE15 8NZ
 Phone: +447983 299 165
steve.mulholland@komfovent.com
www.komfovent.com

PARTNERS

| | | |
|---------|----------------------------------|--|
| AT | J. PICHLER Gesellschaft m. b. H. | www.pichlerluft.at |
| BE | Ventilair group | www.ventilairgroup.com |
| | ACB Airconditioning | www.acbairco.be |
| CZ | REKUVENT s.r.o. | www.rekuvent.cz |
| CH | WESCO AG | www.wesco.ch |
| | SUDCLIMATAIR SA | www.sudclimatair.ch |
| CH / LI | CLIMAIR GmbH | www.climair.ch |
| | Trivent AG | www.trivent.com |
| DK | Øland A/S | www.oeland.dk |
| EE | BVT Partners | www.bvtpartners.ee |
| FR | ATIB | www.atib.fr |
| HR | Microclima | www.microclima.hr |
| | AIRVENT Légotechnikai Zrt. | www.airvent.hu |
| HU | Gevent Magyarország Kft. | www.gevent.hu |
| | Merkapt | www.merkapt.hu |
| IR | Fantech Ventilation Ltd | www.fantech.ie |
| IS | Blikk & Tæknipjónustan ehf | www.bogt.is |
| | Hitataekni ehf | www.hitataekni.is |
| IT | Icaria srl | www.icariavmc.it |
| | Ventilair group | www.ventilairgroup.com |
| NL | DECIPOL-Vortvent | www.vortvent.nl |
| | CLIMA DIRECT BV | www.climadirect.com |
| | Ventilution AS | www.ventilution.no |
| NO | Ventistål AS | www.ventistal.no |
| | Thermo Control AS | www.thermocontrol.no |
| PL | Ventia Sp. z o.o. | www.ventia.pl |
| SE | Nordisk Ventilator AB | www.nordiskventilator.se |
| SI | Agregat d.o.o | www.agregat.si |
| SK | TZB produkt, s.r.o. | www.tzbprodukt.sk |
| UA | TD VECON LLC | www.vecon.ua |